



- ### ITEMS LIST
- Play Equipment**
- A. Pod, 2 cradle & 2 flat seat swings Ref. J493A
  - B. Diabolo Multiplay Unit Ref. J3861A
  - C. Falling Star Springer Ref. J839A
  - D. Junior Metal Monkey Bars Ref. JPS21A-J-M
  - E. Diabolo Sand Play Unit Ref. J3890A
  - F. Sand Digger Ref. J5014A
  - G. Sieve Sand Play Table Ref. J123A
  - H. Metal Senior Monkey Bars Ref. JPS21-A-S-M
- Ancillaries**
- I. 6Lm Log Stockading 150mm dia, 600mm High out of ground Ref. UKQ1038\*
  - J. 6Lm Log Stockading 150mm dia, 900mm High out of ground Ref. UKQ1041\*
  - K. Existing Climbing Stone
  - L. Existing IXO Multiplay Unit
  - M. Existing Rollup
  - N. Existing Picnic Tables
  - O. Existing Litter Bins
- \* Includes Delivery & Off-loading

- Safety Surfacing**
- Swing Area to be surfaced with 54m² Grassmat.
  - Existing Sand Area to be topped up by 2 Tonne Play Sand\*.
  - Play area around sand area to be surfaced with 75m² Grassmat.
- \* Includes Delivery & Off-loading.

- Groundworks**
- Where required, 38m² existing grass and sand to be scraped back along the outside edge of existing wooden sleeper perimeter to create a defined edge and to be finished with 38m² Topsoil and Turf.
  - 140m² Shrub beds to be covered over with 140m² Topsoil and Turf.
  - 94m² Topsoil and Turf to areas where swing grassmats have been removed.
  - Existing paths and picnic table areas to have 50m² of ground preparation including jet washing, weed killing and grass cutting to restore defined area and edges.
  - Up to 20Lm Sleeper Stockading 300Mm High to Replace existing broken edging.

- Removals**
- Removal of existing Pod, Cradle and Flat Seat Swings including associated Grass mats.
  - Remove Existing Sand Play Unit, Single Post, 2 x Elephant Springers, Stainless Steel Springer, Sand Digger, Rotating element from Multiplay Unit and Sand Table.
  - Removal of approx 30 Shrubs.
  - Removal of up to 20Lm existing broken edging.
  - Removal of 140m² top 50mm layer of existing bark chips and 1 x tree stump from Shrub beds.

**Miscellaneous**

- Rub down and repaint of 2 x Picnic Tables.
- Post Installation Inspection.

- Added Value Items**
- Spares Box worth £500
  - 100 Proludic Branded Buckets & Spades

*Existing Gates to be replaced / repaired by Others.*

*Exact location of equipment to be confirmed on site with client.*


*Preliminaries have been included within your quotation, these equate to site setup, site storage, delivery, unloading of equipment, site welfare, heras fencing & signage and skips (this can also include supervision where necessary).*

*Topsoil & Turf to be done by Proludic (watering is the responsibility of others and has not been costed for).*

*All pathways, furniture, planting, mounding and any other soft landscaping works not mentioned above are to be done by others.*

*Some images shown are for illustrative purposes only. The quote and items list will show the exact equipment used.*

**PRODUCT KEY**

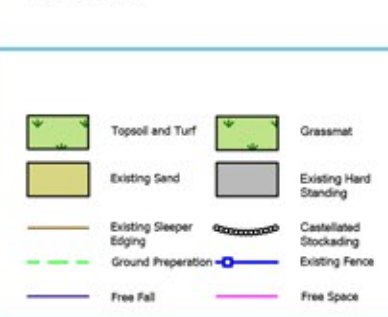

# Lennox Park Play Area - Milngavie

East Dunbartonshire Council

DATE: 10/02/2020 REF: 2002.25365(LennoxPark\_Milngavie\_EastDunbartonshireC)

REV: - DB: PP CB: AL SCALE: 1:200 @ A3

